

THE PRIMARY SOURCE FOR ELECTRONIC INDUSTRY





CALYX ELECTRO - MECH

MANUFACTURERS OF : FUSE HOLDERS, TERMINALS, CONNECTORS & SOCKETS


Office : D/1, Anandvan Society, B/h. Angan Towers
Manjalpur, Vadodara. Tel.: 0265 - 6457207

CONNECTORS



SERIES 508 : 2 WAY & 3 WAY

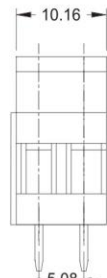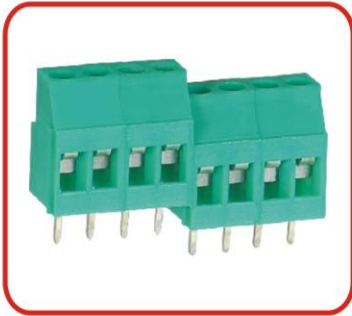


508 2WAY

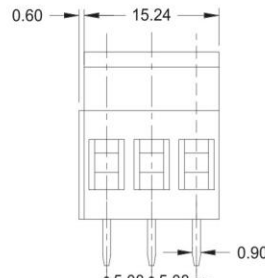


508 3WAY

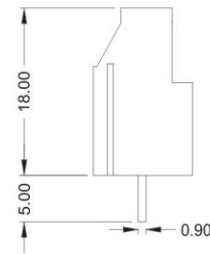



SERIES 58 : 2 WAY & 3 WAY

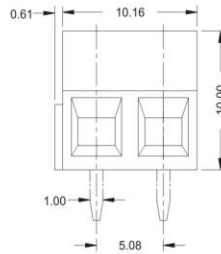


58 2WAY

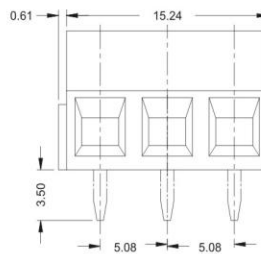


58 3WAY

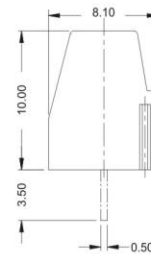



SERIES 75 : 2 WAY & 3 WAY

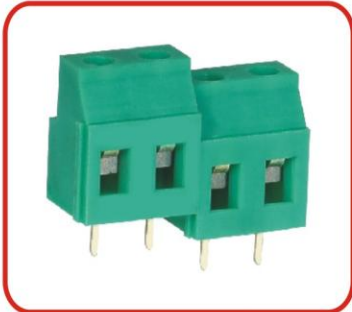

75 2WAY

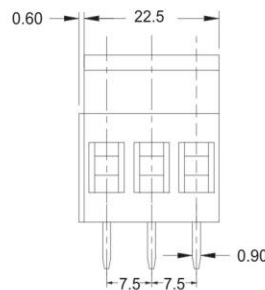

75 3WAY

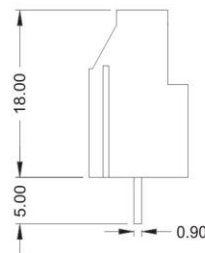

SPECIFICATION

NOMINAL CURRENT - 10A

NOMINAL VOLTAGE - 250V

INSULATION RESISTANCE - 1000 M ohm min at 500V DC

DIELECTRIC STRENGTH - > 2 KV

MOULDED MATERIAL - Polyamide 6,6

TERMINAL - Tin / Silver Plated copper Alloy

PITCH - 5.08 / 7.5 mm

WIRE CAGE - Brass Nickel Plated

SCREW - Brass Nickel Plated

WIRE SIZE 0 - 2.5 sq.mm (max)

SCREW SIZE - M3 x .5

MAX. TORQUE FOR TERMINAL SCREWS - 0.5 to 0.6Nm