


DIE GRINDERS

URYU Die Grinders, ruggedly designed for mounted wheels and carbide burrs, are ideal for rapid metal removal or precise finishing such as weld cleaning, deburring, die contouring and repair, blending and smoothing.

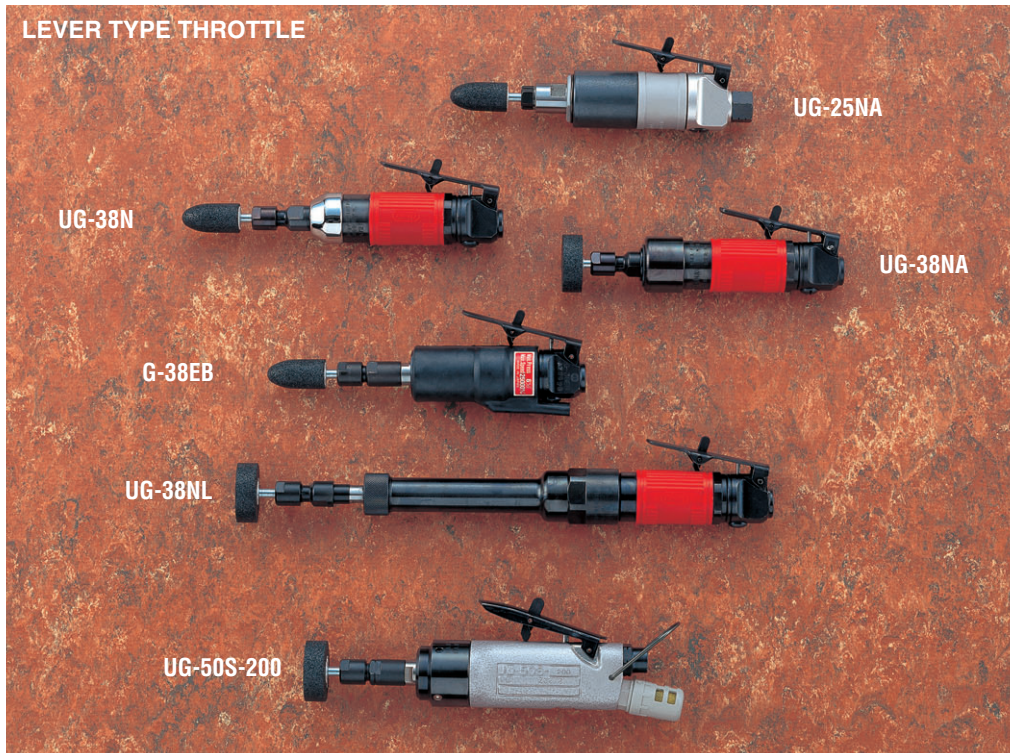


Self-Locking Lever attachment

To prevent accidental start of motor.



COLLET CHUCKS

G-38EB & UG-50S-200

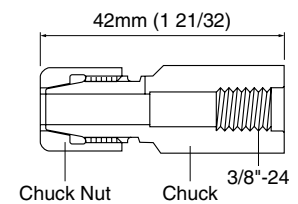

- 923-534-0 3mm
- 923-535-0 6mm
- 923-536-0 1/4"

SPECIFICATIONS


Recommended Air Pressure : 0.6MPa (85psi)

Model	Collet Chuck Size		Max.Free Speed (about)	Rated Horse Power	Overall Length (about)		Weight less wheel (about)		Air Inlet Thread (Pipe Tap)	Air Hose Size		Average Air Consumption		Noise Level
	mm	in	rpm	w	mm	in	kg	lb	in	mm	in	m ³ /min	ft ³ /min	dB(A)
UG-25NA	6	1/4	25000	210	153	6 1/32	0.53	1.17	NPT1/4	9.5	3/8	0.3	10.7	82
G-38EB	6	1/4	20000	315	165	6 1/2	0.65	1.43	NPT1/4	9.5	3/8	0.4	14.0	85
UG-38N	6	1/4	25000	315	164	6 15/32	0.57	1.25	NPT1/4	9.5	3/8	0.3	10.7	85
UG-38NA	6	1/4	22000	315	165	6 1/2	0.65	1.43	NPT1/4	9.5	3/8	0.4	14.0	75
UG-38NL	6	1/4	21000	315	330	13	0.92	2.02	NPT1/4	9.5	3/8	0.3	10.7	85
UG-50S-200	6	1/4	23000	195	198	7 51/64	0.60	1.32	NPT1/4	9.5	3/8	0.4	14.0	73




COLLET CHUCKS

UG-25N & UG-50S-200A



- 923-001-0 3mm
- 923-003-0 6mm
- 923-005-0 1/8"
- 923-006-0 1/4"

UG-38N Series



- 923-510-0 3mm
- 923-512-0 6mm
- 923-515-0 1/8"
- 923-516-0 1/4"

SPECIFICATIONS

Recommended Air Pressure : 0.6MPa (85psi)

Model	Collet Chuck Size		Max.Free Speed (about)	Rated Horse Power	Overall Length (about)		Weight less wheel (about)		Air Inlet Thread (Pipe Tap)	Air Hose Size		Average Air Consumption		Noise Level
	mm	in	rpm	w	mm	in	kg	lb	in	mm	in	m ³ /min	ft ³ /min	dB(A)
UG-25NSA	6	1/4	25000	210	145	5 23/32	0.56	1.23	NPT1/4	9.5	3/8	0.3	10.7	82
UG-38NS	6	1/4	25000	315	168	6 5/8	0.60	1.32	NPT1/4	9.5	3/8	0.3	10.7	85
UG-38NSA	6	1/4	22000	315	174	6 54/64	0.65	1.43	NPT1/4	9.5	3/8	0.3	10.7	75
UG-38NSL	6	1/4	25000	315	340	13 25/64	0.95	2.09	NPT1/4	9.5	3/8	0.3	10.7	85