



THE PRIMARY SOURCE FOR ELECTRONIC INDUSTRY CALONIX ELECTRONICS PVT. LTD.

MANUFACTURERS OF : TOGGLE, ROCKER & PUSH BUTTON SWITCHES





Exporter To U.S.A.

www.calonix.net

MICRO TOGGLE SWITCHES


SPDT / DPDT Micro Toggle Switches, Solder / PCB Terminals

Function : ON - NONE - ON

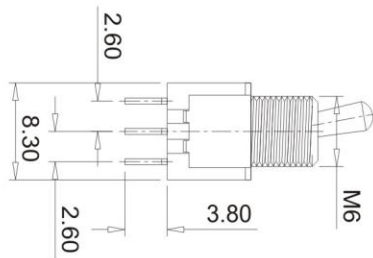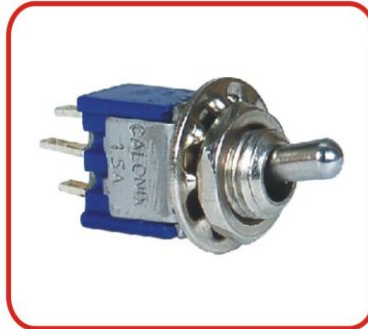


MOUNTING HARDWARE

HEX-NUT



WASHER



SPECIFICATIONS :

CONTACT RATING - 1.5 amps with resistive load @ 250 V AC or 14 V DC

ELECTRICAL LIFE - 20,000 make-and-break cycles at full load.

CONTACT RESISTANCE - 10 milliohms max. initial @ 2-4 V DC

100 milliamps for both coin silver and gold plated contacts.

INSULATION RESISTANCE - 1,000 Megaohms. min.

DIELECTRIC STRENGTH - 1,000 Volts RMS @ Sea level.

OPERATING TEMPERATURE : - 20° C to 65° C

MATERIAL :

CASE - Diallyl phthalate (DAP)

TOGGLE HANDLE - Brass, Chrome plated

BUSHING - Brass, nickel plated

HOUSING - stainless steel

END TERMINAL - Copper, Silver plated or gold plated

CENTRE CONTACT & TERMINAL - Copper, silver plated or gold plated.

HARDWARE - Nut-Brass, nickel plated,

LOCKING RING - Brass, nickel plated

LOCKWASHER - steel, bright nickel plated.