




AIR HOIST
LIFTING CAPACITY - 60 Kg. TO 6000 Kg.

SS AIR TOOLS



AIR HOIST

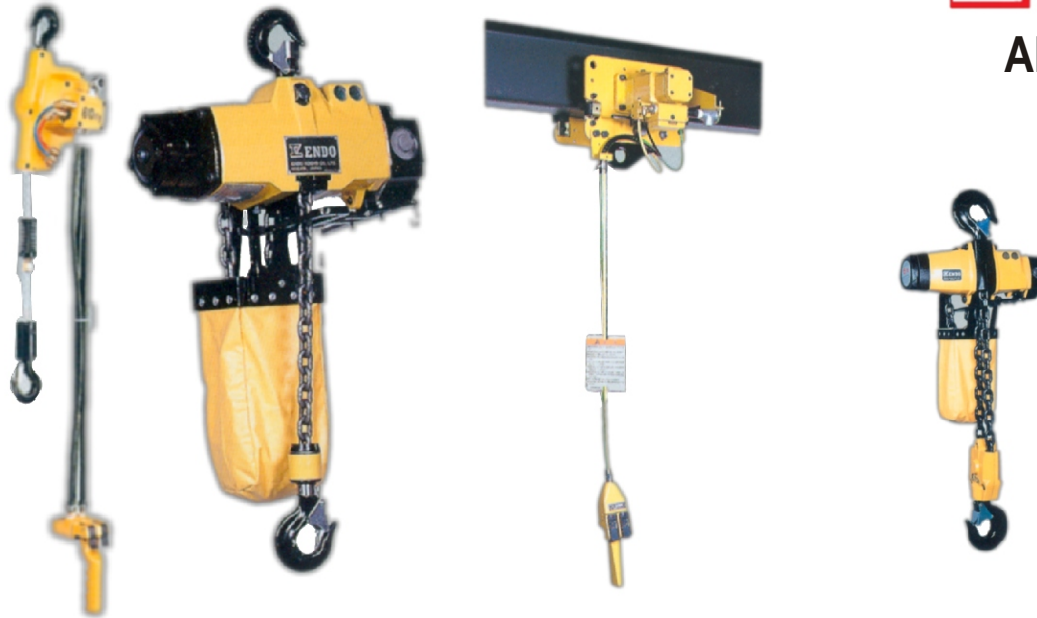

Model	Rated load t	Stroke	Air Pressure MPa (kgf/cm ²)	Lifting Speed m/min	Air consumption m ³ /min	Chain Size X Fall	Air Inlet	Mass Kg
AT-60K AT-60K-5	60kg	3	0.4{4}	16.5	0.52	4.0x1	Rc 3/8	12.3 (13.0)
			0.5{5}	20.00	0.67			
			0.6{6}	23.5	0.85			
ATC-60K ATC-60K-5	60kg	2	0.4{4}	14.0	0.45	4.0x1	Rc 3/8	14.3
			0.5{5}	17.0	0.58			
			0.6{6}	20.0	0.68			
AT-125K AT-125K-5	125kg	3	0.4{4}	10.0	0.55	4.0x1	Rc 3/8	12.5 (13.2)
			0.5{5}	12.0	0.71			
			0.6{6}	14.5	0.90			
ATC-125K ATC-125K-5	125kg	2	0.4{4}	6.5	0.42	4.0x1	Rc 3/8	14.5
			0.5{5}	10.5	0.55			
			0.6{6}	12.0	0.65			
EHL-025TS	1/4	3	0.4{4}	12.0	0.9	6.3x1	Rp 1/2	18.7
			0.5{5}	16.0	1.3			
			0.6{6}	18.0	1.6			
EHL05TS	1/2	3	0.4{4}	7.5	0.95	6.3x1	Rp 1/2	18.7
			0.5{5}	9.0	1.3			
			0.6{6}	10.5	1.65			
EHL-098TW	980kg	3	0.4{4}	3.7	0.95	6.3x2	Rp 1/2	24.2
			0.5{5}	4.5	1.3			
			0.6{6}	5.2	1.65			
EHL-1TW	1	3	0.4{4}	3.7	0.95	6.3x2	Rp 1/2	24.2
			0.5{5}	4.5	1.3			
			0.6{6}	5.2	1.65			
EHL-1TS	1	3	0.4{4}	4.0	1.0	7.1x1	Rp 1/2	34.0
			0.5{5}	5.2	1.4			
			0.6{6}	6.0	1.8			
EHL-2TW	2	3	0.4{4}	2.0	1.0	7.2x2	Rp 1/2	42.0
			0.5{5}	2.6	1.4			
			0.6{6}	3.0	1.8			
EHL-3TS	3	3	0.4{4}	2.0	1.75	12.5x1	Rp 3/4	75.0
			0.5{5}	2.6	2.47			
			0.6{6}	3.0	3.14			
EHL-6TW	6	3	0.4{4}	1.0	1.75	12.5x2	Rp 3/4	96.0
			0.5{5}	1.3	2.47			
			0.6{6}	1.5	3.14			