


Double Acting Multi Strand Jacks With Integral Wedge Lock

Capacity 200 - 680 ton Stroke 100 - 300 mm Max Working Pressure 630 bar

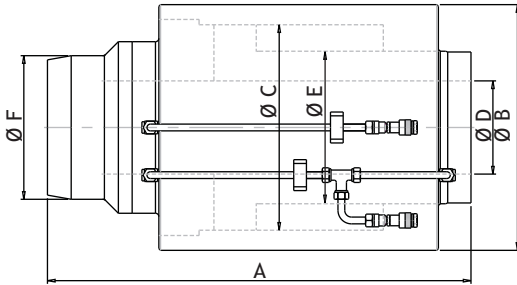

Features

- Pre-stressing & post tensioning of tendons in concrete structure.
- Wedgelock cylinder is built into the jack.
- Strand length for gripping is more.

OMI Series

O Orione **M** Multi strand **I** Integral wedge lock **520** Capacity - ton **200** Stroke - mm **195** Center hole-mm

Capacity (ton)	Stroke (mm)	Model	Strand Arrangement	Effective Area (cm ²)	Oil Cap. (mm)	Close Height (mm) A	Cylinder OD (mm) B	Bore Dia. (mm) C	C'hole Dia. (mm) D	Ram Dia. (mm) E	Nose Dia. (mm) F	Wt. (Approx.) (kg.)
520	200	OMI 520-200-195	1906,2206	833.9	16680	825	520	420	195	340	310	800
680	300	OMI 680-300-225	3106	1253.5	37605	1000	580	485	225	360	340	1160

■ Higher capacity and customized solutions on request. ■ Specifications are subject to change due to continual improvement.