


OIL-PULSE TYPE SCREWDRIVERS

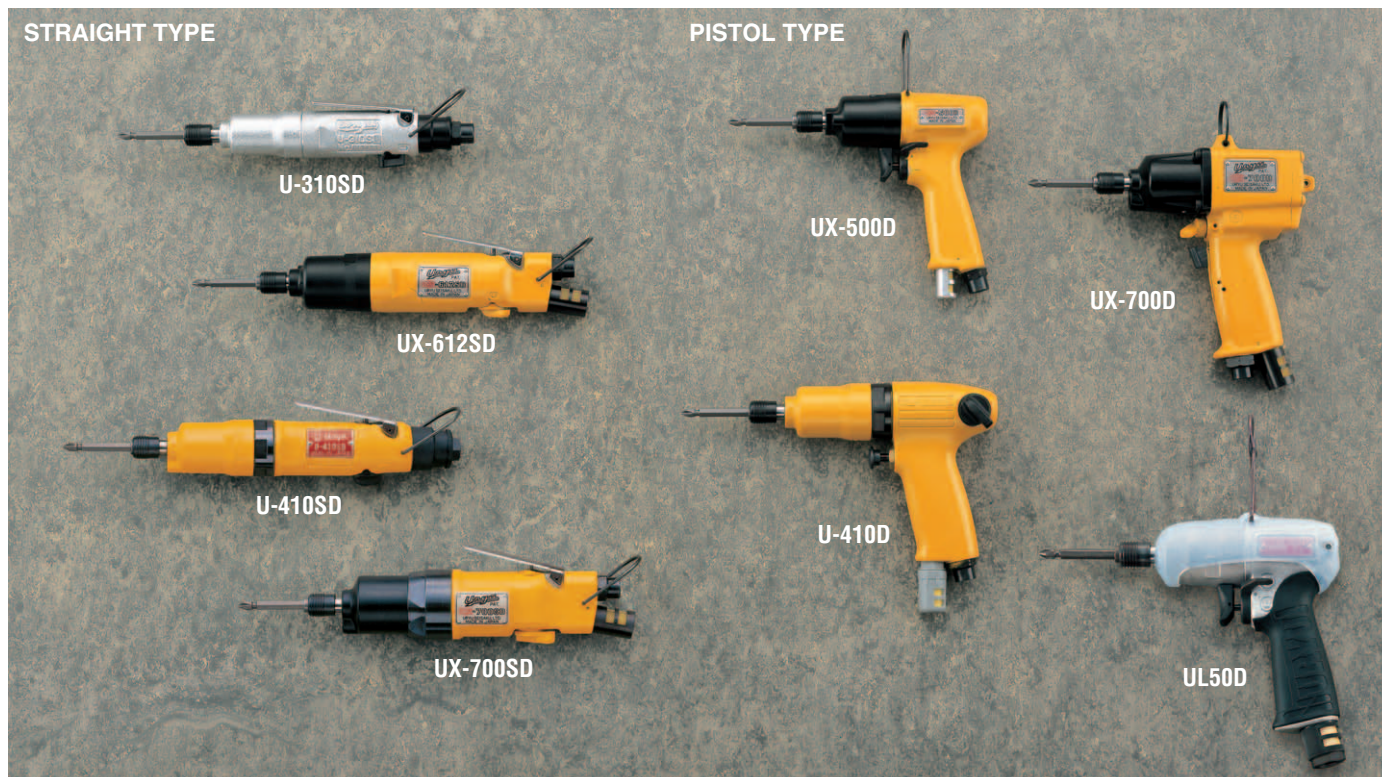

SPECIFICATIONS (STRAIGHT TYPE)

Recommended Air Pressure:0.6MPa(85psi)

Model	Capacity (Screw Size)		Torque Range		Free Speed (Approx.) rpm	Overall Length (about)		Weight Less Bit (about)		From Center to Outside (about)		Air Hose Size (inside Die)		Average Air Consumption		Noise Level dB(A)
	mm	in	Nm	ft-lbs		mm	in	kg	lb	mm	in	m ³ /min	ft ³ /min	dB(A)	m/sec ²	
U-310SD	M3-4	No.8	2.50-3.10	1.8-2.2	11000	222	8 45/64	0.62	1.50	18.0	47/64	9.5	3/8	0.15	5.3	68
U-350SD	M3-4	No.8	3.50-5.80	2.6-3.1	10500	238	9 3/8	0.71	1.50	22.0	47/64	9.5	3/8	0.15	5.3	74
U-410SD	M4-5	No.8-10	7.00-10.0	5.2-7.4	10500	240	9 27/32	0.80	1.80	22.0	7/8	9.5	3/8	0.15	5.3	91
UX-450SD	M5	No.10	8.00-14.0	5.9-10.4	9500	239	9 11/64	0.80	1.80	22.0	7/8	6.35	1/4	0.20	7.0	67
UX-500SD	M5-6	No.10-1/4	13.0-20.0	9.6-14.8	9300	244	9 39/64	0.92	2.00	22.0	7/8	6.35	1/4	0.25	8.8	70
UX-612SD	M6-8	1/4-5/16	16.0-28.0	11.9-20.8	9300	253	9 61/64	1.00	2.20	23.0	29/32	6.35	1/4	0.30	10.7	77
UX-700SD	M8	5/16	20.0-36.0	14.6-26.6	9000	249	9 51/64	1.27	2.80	26.5	1 3/64	6.35	1/4	0.35	12.3	79
UL30SD	M5	13/64	6.00-12.0	4.4-8.9	5000	209	8 15/64	0.62	1.40	20.5	51/64	6.5	1/4	0.23	8.1	75
UL40SD	M5-6	13/64-1/4	9.00-20.0	6.7-14.8	5000	209	8 15/64	0.62	1.40	20.5	51/64	6.5	1/4	0.23	8.1	75
UL50SD	M6-8	1/4-5/16	18.0-28.0	13.3-20.7	6400	214	8 27/64	0.74	1.60	22.0	7/8	6.5	1/4	0.35	19.3	78
UL60SD	M8	5/16	22.0-35.0	16.3-25.9	6700	212	8 11/32	0.77	1.70	22.0	7/8	8.0	5/16	0.45	15.8	80

Air Inlet Size : NPT1/4" Hex. Size of Bit : 6.35mm (1/4")

SPECIFICATIONS (PISTOL TYPE)

Recommended Air Pressure:0.6MPa(85psi)

Model	Capacity (Screw Size)		Torque Range		Free Speed (Approx.) rpm	Overall Length (about)		Weight Less Bit (about)		From Center to Outside (about)		Air Hose Size (inside Die)		Average Air Consumption		Noise Level dB(A)
	mm	in	Nm	ft-lbs		mm	in	kg	lb	mm	in	m ³ /min	ft ³ /min	dB(A)	m/sec ²	
U-350D	M3-4	No.8	3.5-5.8	2.6-4.3	11500	155	6 3/32	0.76	1.60	22.0	7/8	6.35	1/4	0.15	5.3	74
U-410D	M4-5	No.8-10	7.0-10.0	5.2-7.4	10000	188	7 13/32	1.00	2.20	22.0	7/8	6.35	1/4	0.15	5.3	70
UX-450D	M5	No.10	8.0-14.0	5.9-10.4	9500	151	5 15/16	0.85	1.90	22.0	7/8	6.35	1/4	0.20	7.0	75
UX-500D	M5-6	No.10-1/4	13.0-20.0	9.6-14.8	9300	152	5 63/64	0.85	1.90	22.0	7/8	6.35	1/4	0.25	8.8	70
UX-612D	M6-8	1/4-5/16	16.0-28.0	11.8-20.7	9300	164	6 29/64	0.95	2.10	23.0	29/32	6.35	1/4	0.30	10.5	75
UX-700D	M8	5/16	20.0-36.0	14.8-26.6	9000	171	6 47/64	1.38	3.00	26.0	1.00	6.35	1/4	0.35	12.3	75
UL30D	M5	No.10	6.0-12.0	4.4-8.9	5700	135	5 5/16	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0	75
UL40D	M5-6	No.10-1/4	11.0-20.0	8.1-14.8	6100	135	5 5/16	0.70	1.5	20.5	13/16	6.35	1/4	0.20	7.0	75
UL50D	M6-8	1/4-5/16	18.0-28.0	13.3-20.7	6500	144	5 43/64	0.77	1.7	22.0	55/64	6.35	1/4	0.30	10.5	78
UL60D	M8	38488	22.0-35.0	16.3-25.9	6700	142	5 19/32	0.82	1.8	22.0	55/64	8.0	5/16	0.40	14.0	80

Air Inlet Size : NPT1/4" Hex. Size of Bit : 6.35mm (1/4")