


Parameters			
Wattage	3W	5W	7W
Make	Osram/Seoul	Osram/Seoul	Osram/Seoul
Power per LED	1.2 Watt	1.2 Watt	1.2 Watt
Driver Efficiency	> 85%	> 85%	> 85%
Power Factor	>.90	>.90	>.90
Input Frequency	50 Hz	50 Hz	50 Hz
CRI	>85	>85	>85
Control Circuit	PWM Type, Constant Current LED Driver	PWM Type, Constant Current LED Driver	PWM Type, Constant Current LED Driver
LED Junction Temperature	< 120Degree	< 120 Degree	< 120 Degree
IP Level	IP 64	IP 64	IP 64
Beam Angle of Luminaire	170 Degree	170 Degree	170 Degree



GEARS Energy Solutions Private Limited,
H-724 Sitapura Industrial Area, Jaipur.
Email – info@gearsenergy.com
Contact No -0141-2771933
Mobile No - 9462784718
Website – www.gearsenergy.com,www.gearslab.com

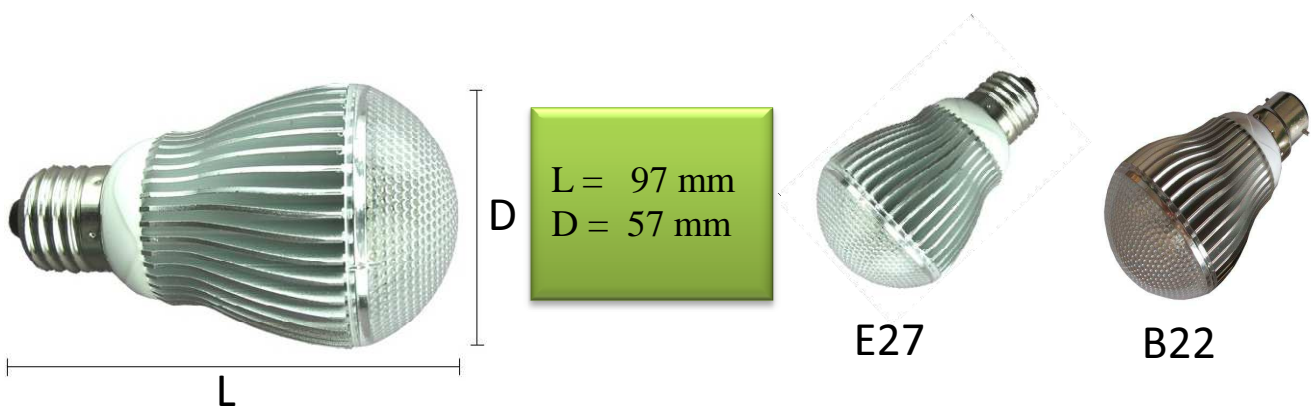