

## Silvol Ultra Premium CH-4 15W40

SILVOL ULTRA PREMIUM CH-4 15W40 is a high quality specially formulated engine oil for the use in high speed, four stroke diesel engines to meet latest exhaust emission standards as well as for previous model years. These oil is specially compounded for use with diesel fuels with sulfur contents upto 0.5% weight.

### Product features:


- Silvol Ultra Premium CH4 15W40 meets the requirement of the most high speed diesel engines operating under severe duty and is suitable for " long drain" or 'extended drain"applications.
- It meets the requirement of API CH-, MB228.3, ACEA E5/E7.

### Applications:

- It is recommended for all modern Turbo charged diesel engines operating under severe duty cycle like for use in the engines of Caterpillar, Volvo, Tata Motors, Cummins, Ashok Leyland Etc.
- These oil can be used in place of CD, CE, CF-4, and CG-4 oils.

**Performance level :** API CH-4 , ACEA E5/E7 and MB 228.3

Available in :

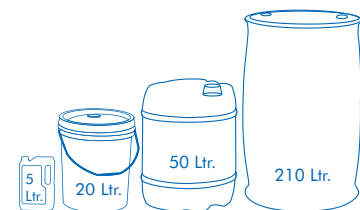

API CH-4 GRADE

## SPECIFICATIONS

Sr.No.	Properties		SAE Grade
			15W40
1	Kinematic Viscosity, cSt@100o C	Min	14.5
		Max	16.3
2	Viscosity Index	Min	135
3	Flash Point, COC, °C	Min	210
4	T B N	Max	10.0

\* The specifications are subject to variations / development / customization