


## DIN 7985/IS : 7483 -1985/ISO 7045

### Cross Recessed Raised Cheese Head Screws (PAN Philip Screw)

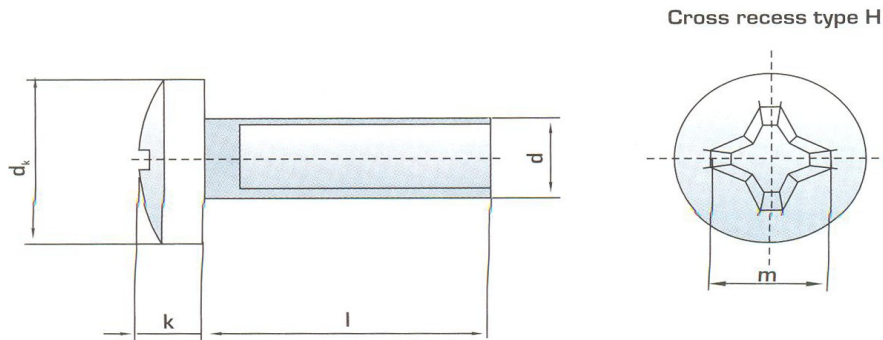

| Thread size d    | M1.6 | M2   | M2.5 | M 3  | M3.5 | M4   | M5   | M6   | M8    | M10   |       |
|------------------|------|------|------|------|------|------|------|------|-------|-------|-------|
| Pitch            | 0.35 | 0.4  | 0.45 | 0.5  | 0.6  | 0.7  | 0.8  | 1    | 1.25  | 1.5   |       |
| dk               | max  | 3.2  | 4    | 5    | 6    | 7    | 8    | 10   | 12    | 16    | 20    |
|                  | min  | 2.9  | 3.7  | 4.7  | 5.7  | 6.64 | 7.64 | 9.64 | 11.57 | 15.57 | 19.48 |
| k                | max  | 1.42 | 1.72 | 2.12 | 2.52 | 2.82 | 3.25 | 3.95 | 4.75  | 6.15  | 7.68  |
|                  | min  | 1.18 | 1.48 | 1.88 | 2.28 | 2.58 | 2.95 | 3.65 | 4.45  | 5.85  | 7.32  |
| Cross recess No. | 0    | 1    |      |      | 2    |      |      | 3    | 4     |       |       |
| M                | 1.8  | 2.5  | 2.7  | 3.1  | 4.2  | 4.6  | 5.3  | 6.8  | 9     | 10.2  |       |
| Penetration min  | 0.72 | 1.1  | 1.3  | 1.7  | 1.74 | 2.04 | 2.77 | 3.03 | 4.18  | 5.38  |       |
| Type H depth max | 1.02 | 1.4  | 1.6  | 2    | 2.24 | 2.54 | 3.27 | 3.53 | 4.68  | 5.88  |       |

\* All Dimensions in mm

