


Workshop Presses

n Capacity 15 - 200 ton n Max. Working Pressure 700 bar

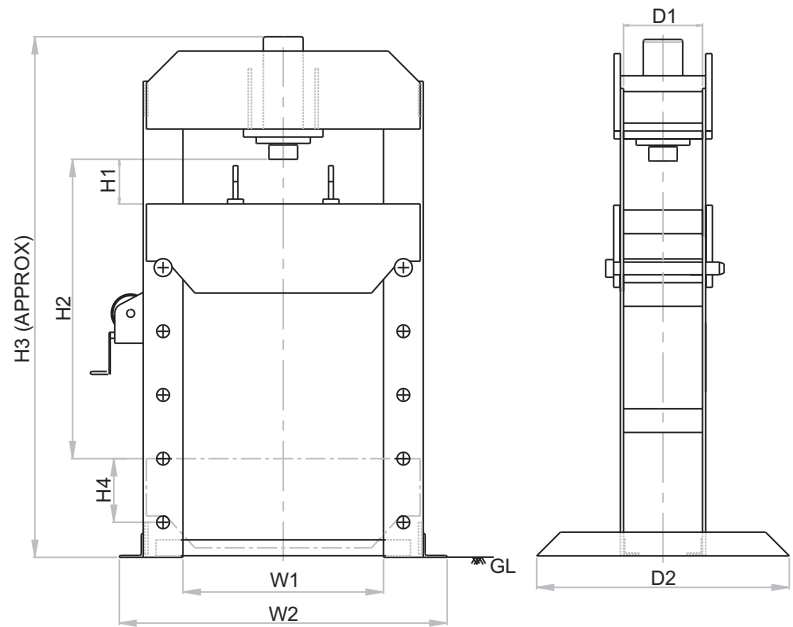

Application

- For removal and fitment of bearings, sprockets, gears and straightening of shafts.

Accessories :

- Two stage hand pump/motorized power pack (optional) with pressure gauge. Pair of "V" blocks and one pushing adaptor.
- Mechanical winch for models 50t and above, optional for others.

OWP series

O Orione W Workshop P Press 15 Capacity - ton

Cylinder capacity (ton)	Stroke (mm)	Model	Day Light		Total Height H3 (mm)	Hole Pitch H4 (mm)	Table With W1 (mm)	Press Width W2 (mm)	Depth		Cylinder Type	Power Source
			Min. H1 (mm)	Min. H2 (mm)					D1 (mm)	D2 (mm)		
15	150	OWP - 15	150	600	1160	150	500	740	200	500	Spring Return	Hand Pump
30	150	OWP - 30	150	750	1455	150	600	900	220	600	Spring Return	Hand Pump
50	150	OWP - 50	150	900	1790	150	750	1130	250	750	Spring Return	Hand Pump
75	200	OWP - 75	200	1200	2130	200	900	1310	280	900	Spring Return	Hand Pump
100	200	OWP - 100	250	1450	2495	200	1000	1470	320	1010	Double Acting	Power Pack
150	300	OWP - 150	250	1500	2765	250	1250	1810	380	1120	Double Acting	Power Pack
200	300	OWP - 200	300	1800	3235	250	1400	2080	450	1350	Double Acting	Power Pack

- Higher capacity and customized solutions on request. ■ Specifications are subject to change due to continual improvement.